



## EASYFILL EF-H Paver Jointing Device

Easy, flexible, quick and thus cost-saving filling of paver joints for small and medium sized areas. Filling material can be filled in both dry or by adding water.

Your Advantages:

▶ **High Physical Relief of Staff**

80% less pushing force due to cleverly designed 80% rotating brushes. This results in an integrated forward drive!

▶ **Robust and Long-life Brushes**

Up to 50 mm of the bristle length can be worn before replacement.

▶ **Continuous & Quick Adjustment of brushes in height through a spindle fixed to the machine.**

▶ **Compact Transport Size**

A foldable handle reduces the size to (LxWxH) 800 x 1,170 x 635 mm.

▶ **Fine Dosing of Water with tap integrated in handle.**

Type	Working width mm (in)	Engine	Dead Weight kg (lbs)	Order-Number
<b>EF-H</b> <sup>Ⓞ</sup>	1,170 (46")	Honda, GXV 160, 4 KW at 3600U RPM	89 (195)	<b>5170.0003</b>
<b>Brush for EF-H</b>				<b>4170.0002</b>



## Sweeping Broom EB

For efficient sand sweeping after the laying of block pavers. Fastest filling of the joints by innovative system of brush-arrangement.

▶ This sweeping broom does not only brush the sand horizontally into the joints, but also diagonally. So the sweeping is a one-way procedure.

▶ Surplus of sand can easily be shoved further on.


▶ Modular principle of design for flexible working width 1,200 and 2,400 mm (or for attachment to wheel-loaders 3,600 mm).

**Standard Specifications:**

▶ With attachment device for laying machine VM 203/204/301/401 as well as for fork-gripping.

Type	Specification	Working Width mm (in)	Dead Weight kg (lbs)	Order-Number
<b>EB 120/240</b> <sup>Ⓞ</sup>	Sweeping Broom complete incl. linkage	1,200 or 2,400	105 (230)	<b>5160.0021</b>
<b>EB 120</b> <sup>Ⓞ</sup>	Sweeping Broom complete incl. linkage	1,200 (47")	64 (140)	<b>5160.0019</b>
<b>AE 120</b> <sup>Ⓞ</sup>	Attachment Device	1,200 (47")	41 (90)	<b>5160.0020</b>
<b>Brush</b>	Brush for EB per piece			<b>4160.0002</b>

The broom can easily be attached to any other carrier – wheel loader, for example.

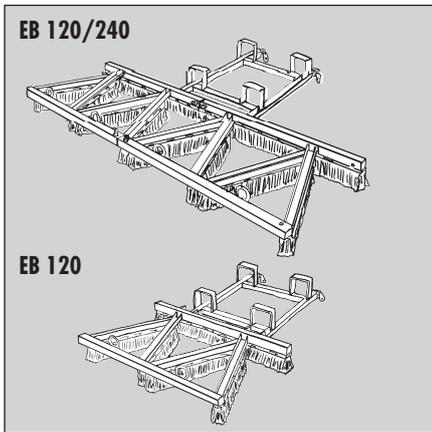

## Profi-Spreading-Bucket ST 180

This powerful attachment device for wheel-loaders increases the productivity and lowers the costs.

▶ Versatile use – for sand, chipping, gravel, peat or topsoil up to a graining of 100 mm.

**A surface of 5.000 sqm can be spread per hour!**

▶ Before joint-filling of freshly laid pavers and slabs, the time-intensive work of sand-distribution has to be done. Here the ST 180 saves time, working potential and costs.

▶ Quick loading of the bucket: The hydraulically driven ST 180 is fitted to a wheel-loader. Like with a normal wheel-loader-bucket the

operator drives into the sand-heap and tilts the bucket backwards. The bucket holds 900 litres.

▶ High working quality and spreading efficiency, with adequate rates: The spreading width of the ST is 1,800 mm. In the full width the spreading quantities can be adjusted between 5 and 100 kg per sqm.

▶ An absolutely one-man-device. The driver of the wheel-loader can do all operations by himself!

▶ Innovative spreading technology

▶ Self-cleaning spreading roller

▶ Highest Working Security



Type	Spreading Width mm (in)	Power	Loading Capacity (liter)	Spreading Quantity (kg/m²)	Spreading Material mm (in)	Dead Weight kg (lbs)	Order-Number
<b>ST 180</b>	1,800 (71")	hydraulically	approx. 900	adjustable 5 to 100	versatile up to a grain-size of 100 (4")	480 (1,060)	<b>5160.0022</b>
<b>Universal-attachment-device for attachment to lifting plate of wheel-loader</b>							<b>5100.0049</b>
<b>Quick-change-device for wheel-loader (please indicate type)</b>							<b>5100.0050</b>

Ⓞ Durable surface protection by galvanizing